

Fold Down installation procedure

1. Mark recommended height position, wall bracket positions and centres
2. Drill four holes with 8mm diameter x 50mm minimum depth
3. Fasten pre-assembled side arms into the wall with 8mm x 50mm Concrete wall anchors (**not supplied**)
4. Pre-assemble front bar, plastic elbow and corner bracket using bolts & nuts and hand tighten only
5. Connect pre-assembled front bar into side arms and tighten nuts & bolts in place
6. For **Twin Fold Down**, follow the same procedure (steps 4 & 5) for both the inner and outer front bars
7. Lift clothesline until arm support is locked into position
8. Start threading from inner most hole (see **Figure 3**) and continue up to last hole position, trim off end and leave 100mm minimum excess (see **Figure 4**)
9. For **Twin Fold Down**, follow the same procedure (steps 7 & 8) for both the inner and outer frames.

15 Year Product Warranty

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

If any part of this clothesline fails to operate correctly due to faulty workmanship or defective


material Dayton Tooling will repair or replace free of cost within 15 years from the date of purchase. (Receipt of purchase required). The PVC line cord is covered by a 2 year warranty from the date of purchase. Any evidence of misuse or incorrect adjustment will void the warranty. To claim a product warranty, please contact Dayton Tooling directly. This warranty is an addition to other rights and remedies of the consumer under law.

Manufactured/supplied by Dayton Tooling Pty Ltd
77-81 Gower Street, Preston Victoria 3072
T (03) 9470 1755 F (03) 9470 5381
enquiry@daytek.com.au

daytek.com.au

Daytek®

Design for Today

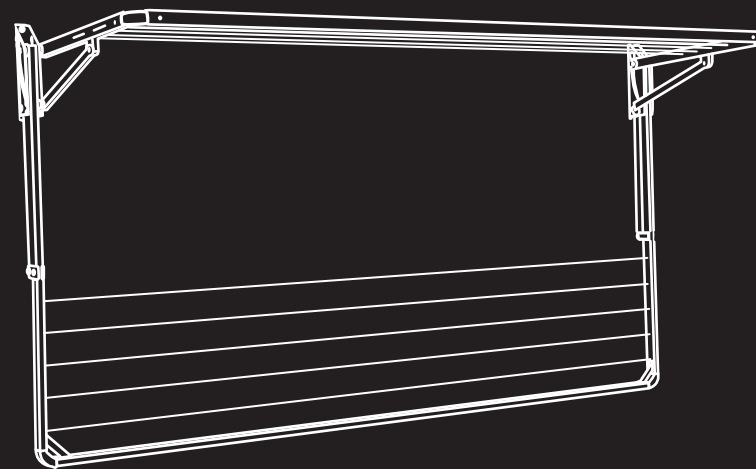

Fold Down Clothesline (Steel Bracket)

Mini / Slim / Single / Twin

Please check that the carton contains all required parts before assembly.

Your carton should contain the following:

1. **Pre-assembled side arms** x 2
2. **Front bar** x 1
(In Twin Fold Down unit x 2)
3. **Bolt packs** (contains installation instructions, bolts & nuts, corner brackets)
4. **Plastic corner elbows** x 2
(In Twin Fold Down unit x 4)
5. **String** (PVC line cord)

Identify the type of installation required for Fold Down clothesline

1. Wall mounting installation – follow **Wall mounting installation** below
2. Alternative free standing mount – use 1 x **Daytek Ground Mount Kit**
 - Sold Separately
 - Ground Mount Kit for Mini Fold Down via special order only

Wall mounting installation

Materials and tools required for installation:

- 8 metre measuring tape & pencil marker
- Hammer drill (can hold up to 12mm diameter concrete drill bit)
- Socket set and adjustable wrench
- Hammer
- Scissors
- 1 spirit level (approximately 500mm long).

Important

Ensure selected location has sufficient side clearances considering wall bracket centre distance. Refer to carton packaging to determine clothesline width.

Recommended height position from ground level to wall bracket top mounting hole is **user height + 100mm** minimum. If required, allow 80mm minimum clearance on each side of wall bracket to clear side walls or fences when folding clothesline up or down.

Twin Fold Down clothesline model has **right & left hand assembly** arms, and an **outer & inner frame** (see assembly overview **Figure 2**).

Figure 1 Single / Slim / Mini Fold Down

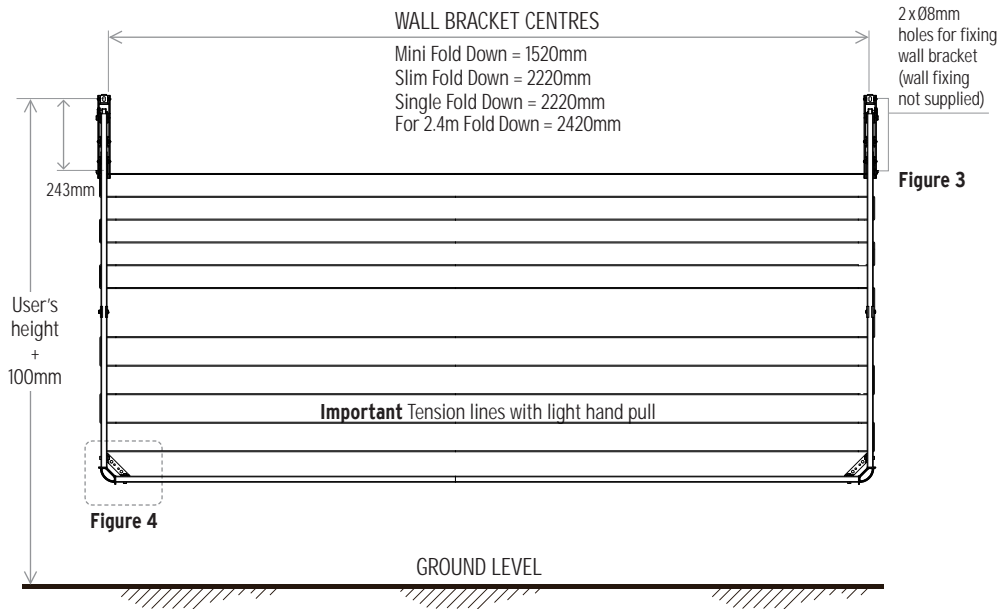


Figure 2 Twin Fold Down

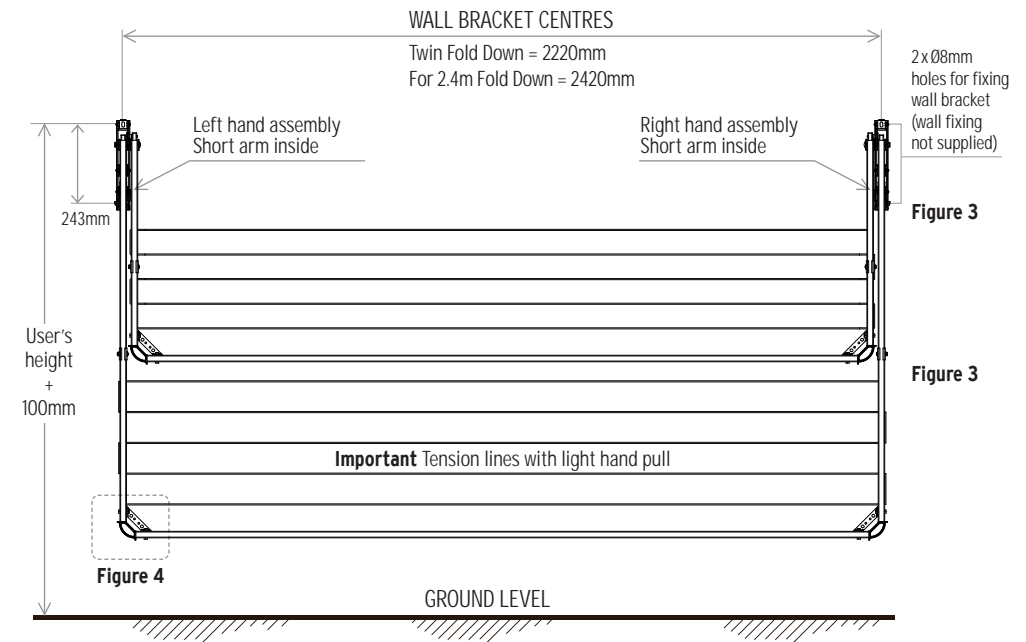


Figure 3




Figure 4

